


## Using the ProFile with the Apple III



### Getting Started

1. **Make sure ALL power has been turned off!**
2. **The Apple III must have an interface card in order to run the Profile. This Interface Card is installed in slot #4 in your Apple III.**

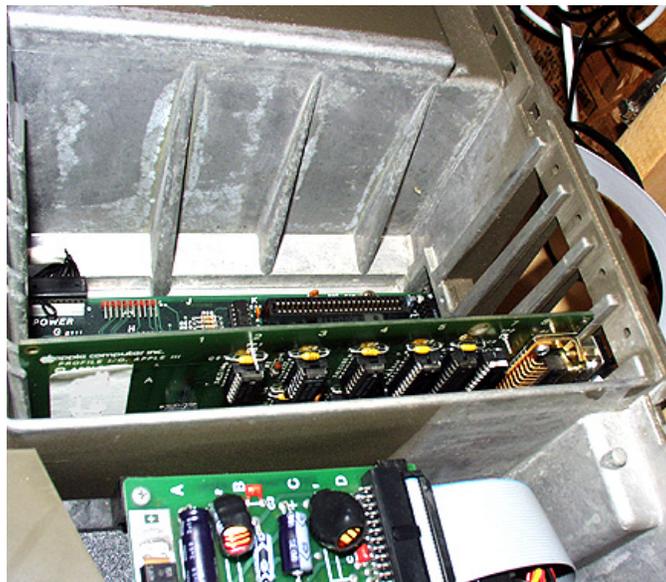

3. **After installing the Interface Card, connect it to your ProFile.**
4. **Now turn on your ProFile.**
5. **Install the Apple III Utility Disk in the Internal Disk Drive.**
6. **Now turn on the power to your Apple III.**
7. **You will see the screen below.**

```
Apple /// Utilities      Main Menu          Version 1.2
© Apple Computer 1980,1981,1983          All Rights Reserved

D - Device Handling Commands
F - File handling commands
S - System Configuration Program (SCP)
Q - Quit

Press:                               ⌘? for Help.
                                       ⌘ is Open Apple

Please select a command: Device handling commands
```

8. Choose “Device Handling Commands”

9. Then choose “Format a Volume”

```
Apple /// Utilities      6 Feb 85 0:02:24 AM
Device Handling Commands Menu          Prefix is /SYS.UTILS

C - Copy one volume onto another
R - Rename a volume
F - Format A Volume
U - Verify a volume

L - List devices configured
T - set Time and date

Press:                               ESCAPE to exit to Main menu    ⌘? for Help.

Please select a command: Format a volume
```

If your SOS Disk does not “see” the Profile, try the option “L” to List Devices Configured to find out if the Profile is recognized

10. Now type in “.PROFILE “ as the Volume Name.

```
Press: RETURN to accept      ESCAPE to restore default
-----
Format the medium of the volume :
PROFILE
with the new volume name : [ /PROFILE ]
```

11. You will receive the large device warning....choose “Return”

```
Apple /// Utilities
Format Volume Command
6 Feb
Prat

Warning: you are about to format a large disk.
Please make sure this is appropriate.

Press: RETURN to accept      ESCAPE to exit to Device menu
-----
Format the medium of the volume :
```

12. You should see the message “Format Successful”

```
Apple /// Utilities
Format Volume Command
6 Feb
Prat

Formatting successful

Press: RETURN to accept      ESCAPE to exit to Device menu
-----
Format the medium of the volume :
PROFILE
with the new volume name : /PROFILE
```

13. You are now ready to install the Apple III Programs Selector onto your ProFile.



